5825

HALF-WAVE VACUUM RECTIFIER

GENERAL DATA

Electrical:

Filament, Thoriated Tungsten:		
Voltage	1.6	ac volts
Current	1.25	amp
Direct Interelectrode Capacitance:[o]		
Plate to Filament	2.2	μμf
Tube Voltage Drop at maximum peak plate current	1750	volts

[o] With no external shield.

Mechanical:

Mounting Position	Any
Overall Length	5-11/16" ± 5/32"
Seated Length	5-1/6" ± 5/32"
Maximum Diameter	2-1/16"
Bulb	ST-16
Cap	Medium
Base	Medium-Shell Small 4-Pin
Basing Designation for BOTTOM VIEW	4P

Pin 1 – Filament
Pin 2 – No Connection
Pin 3 – No Connection
Pin 4 – Filament, Internal Shield
Cap – Plate



HALF-WAVE RECTIFIER

Maximum Ratings, *Absolute Values*:

For supply frequencies up to 250 kc

PEAK INVERSE PLATE VOLTAGE	60000 max.	volts
PEAK PLATE CURRENT	40 max.	ma
AVERAGE PLATE CURRENT	2 max.	ma
HOT-SWITCHING TRANSIENT CURRENT for duration of 0.1 sec. max.	100 max.	ma
PLATE DISSIPATION	3.5 max.	watts
BULB TEMPERATURE	80 max.	°C

Typical Operation at 70 kc in Half-Wave Circuit with Capacitor-Input to Filter:

AC Plate-Supply Voltage (RMS)	21200	volts
Filter-Input Capacitor	350	μμf
Effective Plate-Supply Impedance	120000	ohms
DC Output Current	2	ma
DC Output Voltage at Input to Filter (Approx.):		
At half-load current (1 ma)	28000	volts
At full-load current (2 ma)	26700	volts
Voltage Regulation (Approx.):		
Half-load to full-load current	1300	volts

5825

HALF-WAVE VACUUM RECTIFIER

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Filament Current	1	1.15	1.35	amp
Plate–Filament Capacitance	–	2.14	2.26	μμf

Note: With 1.6 volts dc on filament.

OPERATING NOTES

When the filament is supplied from an rf power source which is at a high dc potential above ground, adjustment of the filament voltage by direct measurement is usually impractical. However, a simple method utilizing visual comparison of filament temperatures can be used for adjustment of filament power. The color temperature of the filament operating from an rf power source may be checked visually by observing in a darkened room the reflection of the incandescent filament upon the surface of the internal shield. A visual comparison of this color temperature with that obtained when the filament of another 5825 is operated from a dc or low-frequency ac supply of 1.6 volts, provides a convenient means for adjusting the amount of rf excitation to produce 1.6 volts (rms) at the filament terminals.

The filament must never under any condition of operation be allowed to reach a temperature higher than that caused by operating the filament on dc or low-frequency ac at a voltage of 1.68 volts. Operation at higher temperatures will cause impaired performance of the tube. During circuit adjustment, however, it is permissible to allow the filament voltage to rise to 2 volts for the brief interval required to make the adjustment.

Soft x-rays are produced when the 5825 is operated at a plate voltage above approximately 20000 volts. These rays can constitute a health hazard unless the tube is adequately shielded. Relatively simple shielding should prove adequate, but the need for this precaution should be considered in equipment design.

5825

HALF-WAVE VACUUM RECTIFIER

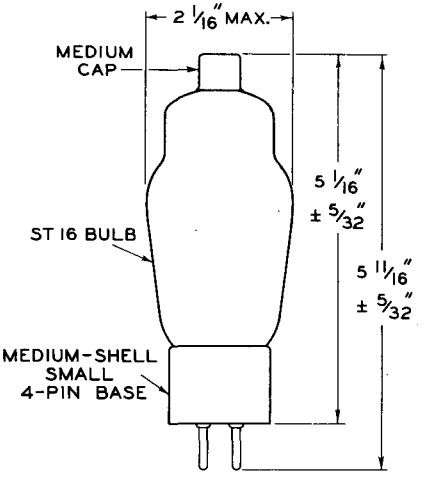

92CS-7176
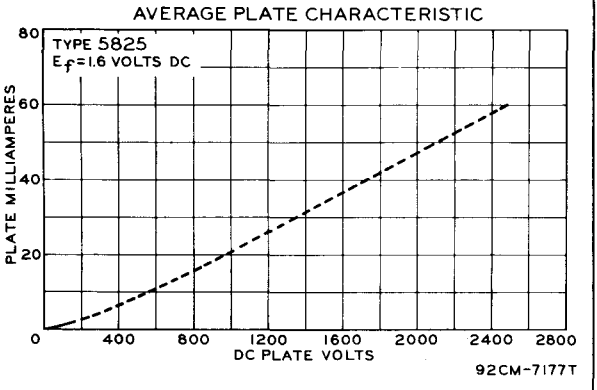
5825
HALF-WAVE VACUUM RECTIFIER