



C16J

C16J/5665

# XENON THYRATRON

NEGATIVE-CONTROL TRIODE TYPE

## GENERAL DATA

## Electrical:


Filament, Coated:	Min.	Avg.	Max.	
Voltage. . . . .	2.4	2.5	2.6	ac or dc volts
Current at 2.5 volts . . .	28	31	34	amp
Minimum heating time prior to tube conduction. . . . .			60	sec
Direct Interelectrode Capacitances (Approx.):				
Grid to anode. . . . .			8	$\mu\mu f$
Grid to cathode. . . . .			29	$\mu\mu f$
Maximum Deionization Time. . . . .			1000	$\mu sec$
Maximum Critical Grid Current. . . . .			10	$\mu amp$
Anode Voltage Drop:				
Average, at beginning of life. . . . .			11	volts
Maximum, at end of life. . . . .			14	volts
Maximum Commutation Factor*, averaged over first 330 volts of inverse anode voltage rise . . . . .			0.66	$va/\mu s^2$
Grid Control Ratio (Approx.):				
For conditions: 10000-ohm grid re- sistor, circuit returns to filament transformer center-tap, filament lead F- negative with respect to filament lead F+ during conduction period, dc anode voltage and dc grid voltage . . . . .				270

## Mechanical:

Mounting Position. . . . .	Vertical, base down
Tube and Base Bracket Dimensions . . .	See Dimensional Outline
Weight (Approx.) . . . . .	14 oz
Bulb . . . . .	T-20
Terminal Connections . . . . .	See Dimensional Outline

## BOTTOM VIEW

F--Filament Lead



G-Grid Lead

P-Anode Lead  
(On end oppo-  
site bracket)

## GRID-CONTROLLED RECTIFIER SERVICE

## Maximum Ratings, Absolute Values:

## PEAK ANODE VOLTAGE:

Forward. . . . .	1000 max.	1000 max.	volts
Inverse. . . . .	1250 max.	1250 max.	volts

\* Defined as the product of the rate of current decay in amperes per microsecond just before conduction ceases and the rate of inverse voltage rise in volts per microsecond following current conduction.

C16J



C16J/5665

## XENON THYRATRON

## GRID VOLTAGE:

Peak, before tube conduction . . . . . -100 max. -100 max. volts

## ANODE CURRENT:

Peak . . . . . 160 max. 100 max. amp

Average\* . . . . . 16 max. 18 max. amp

## Overload:

Rating I*, for duration of . .	1 sec.	72 max.	81 max.	amp
	2 sec.	36 max.	40.5 max.	amp
	3 sec.	24 max.	27 max.	amp
	3.5 sec.	21 max.	22.8 max.	amp
	4 sec.	18 max.	20.3 max.	amp
Rating II**, for duration of . .	3 sec.	24 max.	-	amp
	3.5 sec.	23 max.	22.8 max.	amp
	4 sec.	22 max.	22.5 max.	amp
	4.5 sec.	21.3 max.	22 max.	amp

Fault, for duration of  
0.1 second maximum . . . . 1000 max. 1000 max. amp  
AMBIENT-TEMPERATURE RANGE. . . . -55 to +75 -55 to +75 °C

\* Averaged over any period of 4.5 seconds.

\* Averaged over duration of overload occurring no more than once in any period of 4.5 seconds.

\*\* Averaged over duration of overload occurring no more than once in any period of 30 seconds.

## OPERATING CONSIDERATIONS

The *anode* of the C16J/5665 will show a red color when the tube is operated at full load.


Sufficient *anode-circuit resistance*, including the tube load, must be used under any conditions of operation to prevent exceeding the current ratings of the tube.



C16J

CI6J/5665

## XENON THYRATRON

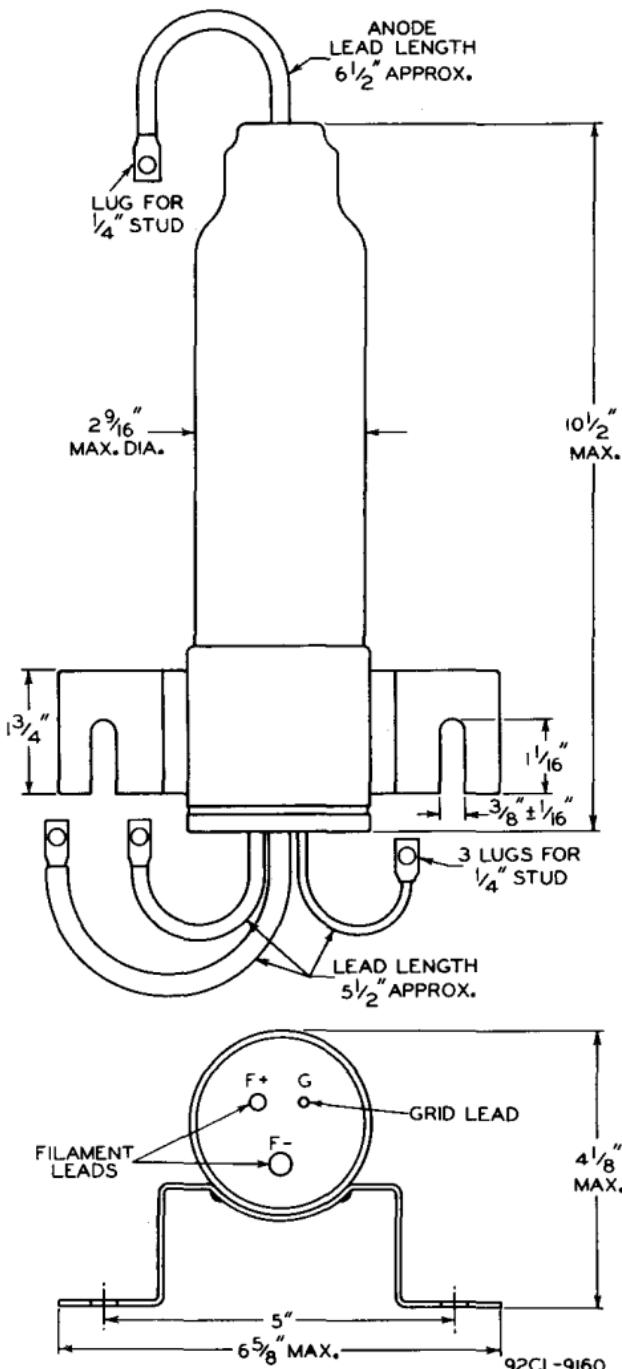



CI6J/5665

## XENON THYRATRON

OPERATIONAL RANGE  
OF CRITICAL GRID VOLTAGE

RANGE IS FOR CONDITIONS WHERE:  
 $E_f = 2.5$  VOLTS  $\pm 5\%$ ; CIRCUIT RE-  
TURNS TO FILAMENT TRANSFORMER  
CENTER-TAP; FILAMENT LEAD F-  
NEGATIVE WITH RESPECT TO FILA-  
MENT LEAD F+ DURING CONDUCTION  
PERIOD. THE RANGE INCLUDES INITIAL  
AND LIFE VARIATIONS OF INDIVIDUAL  
TUBES. GRID RESISTOR = 0 TO 10000  
OHMS. AMBIENT TEMPERATURE RANGE  
-55 TO +75°C.

